


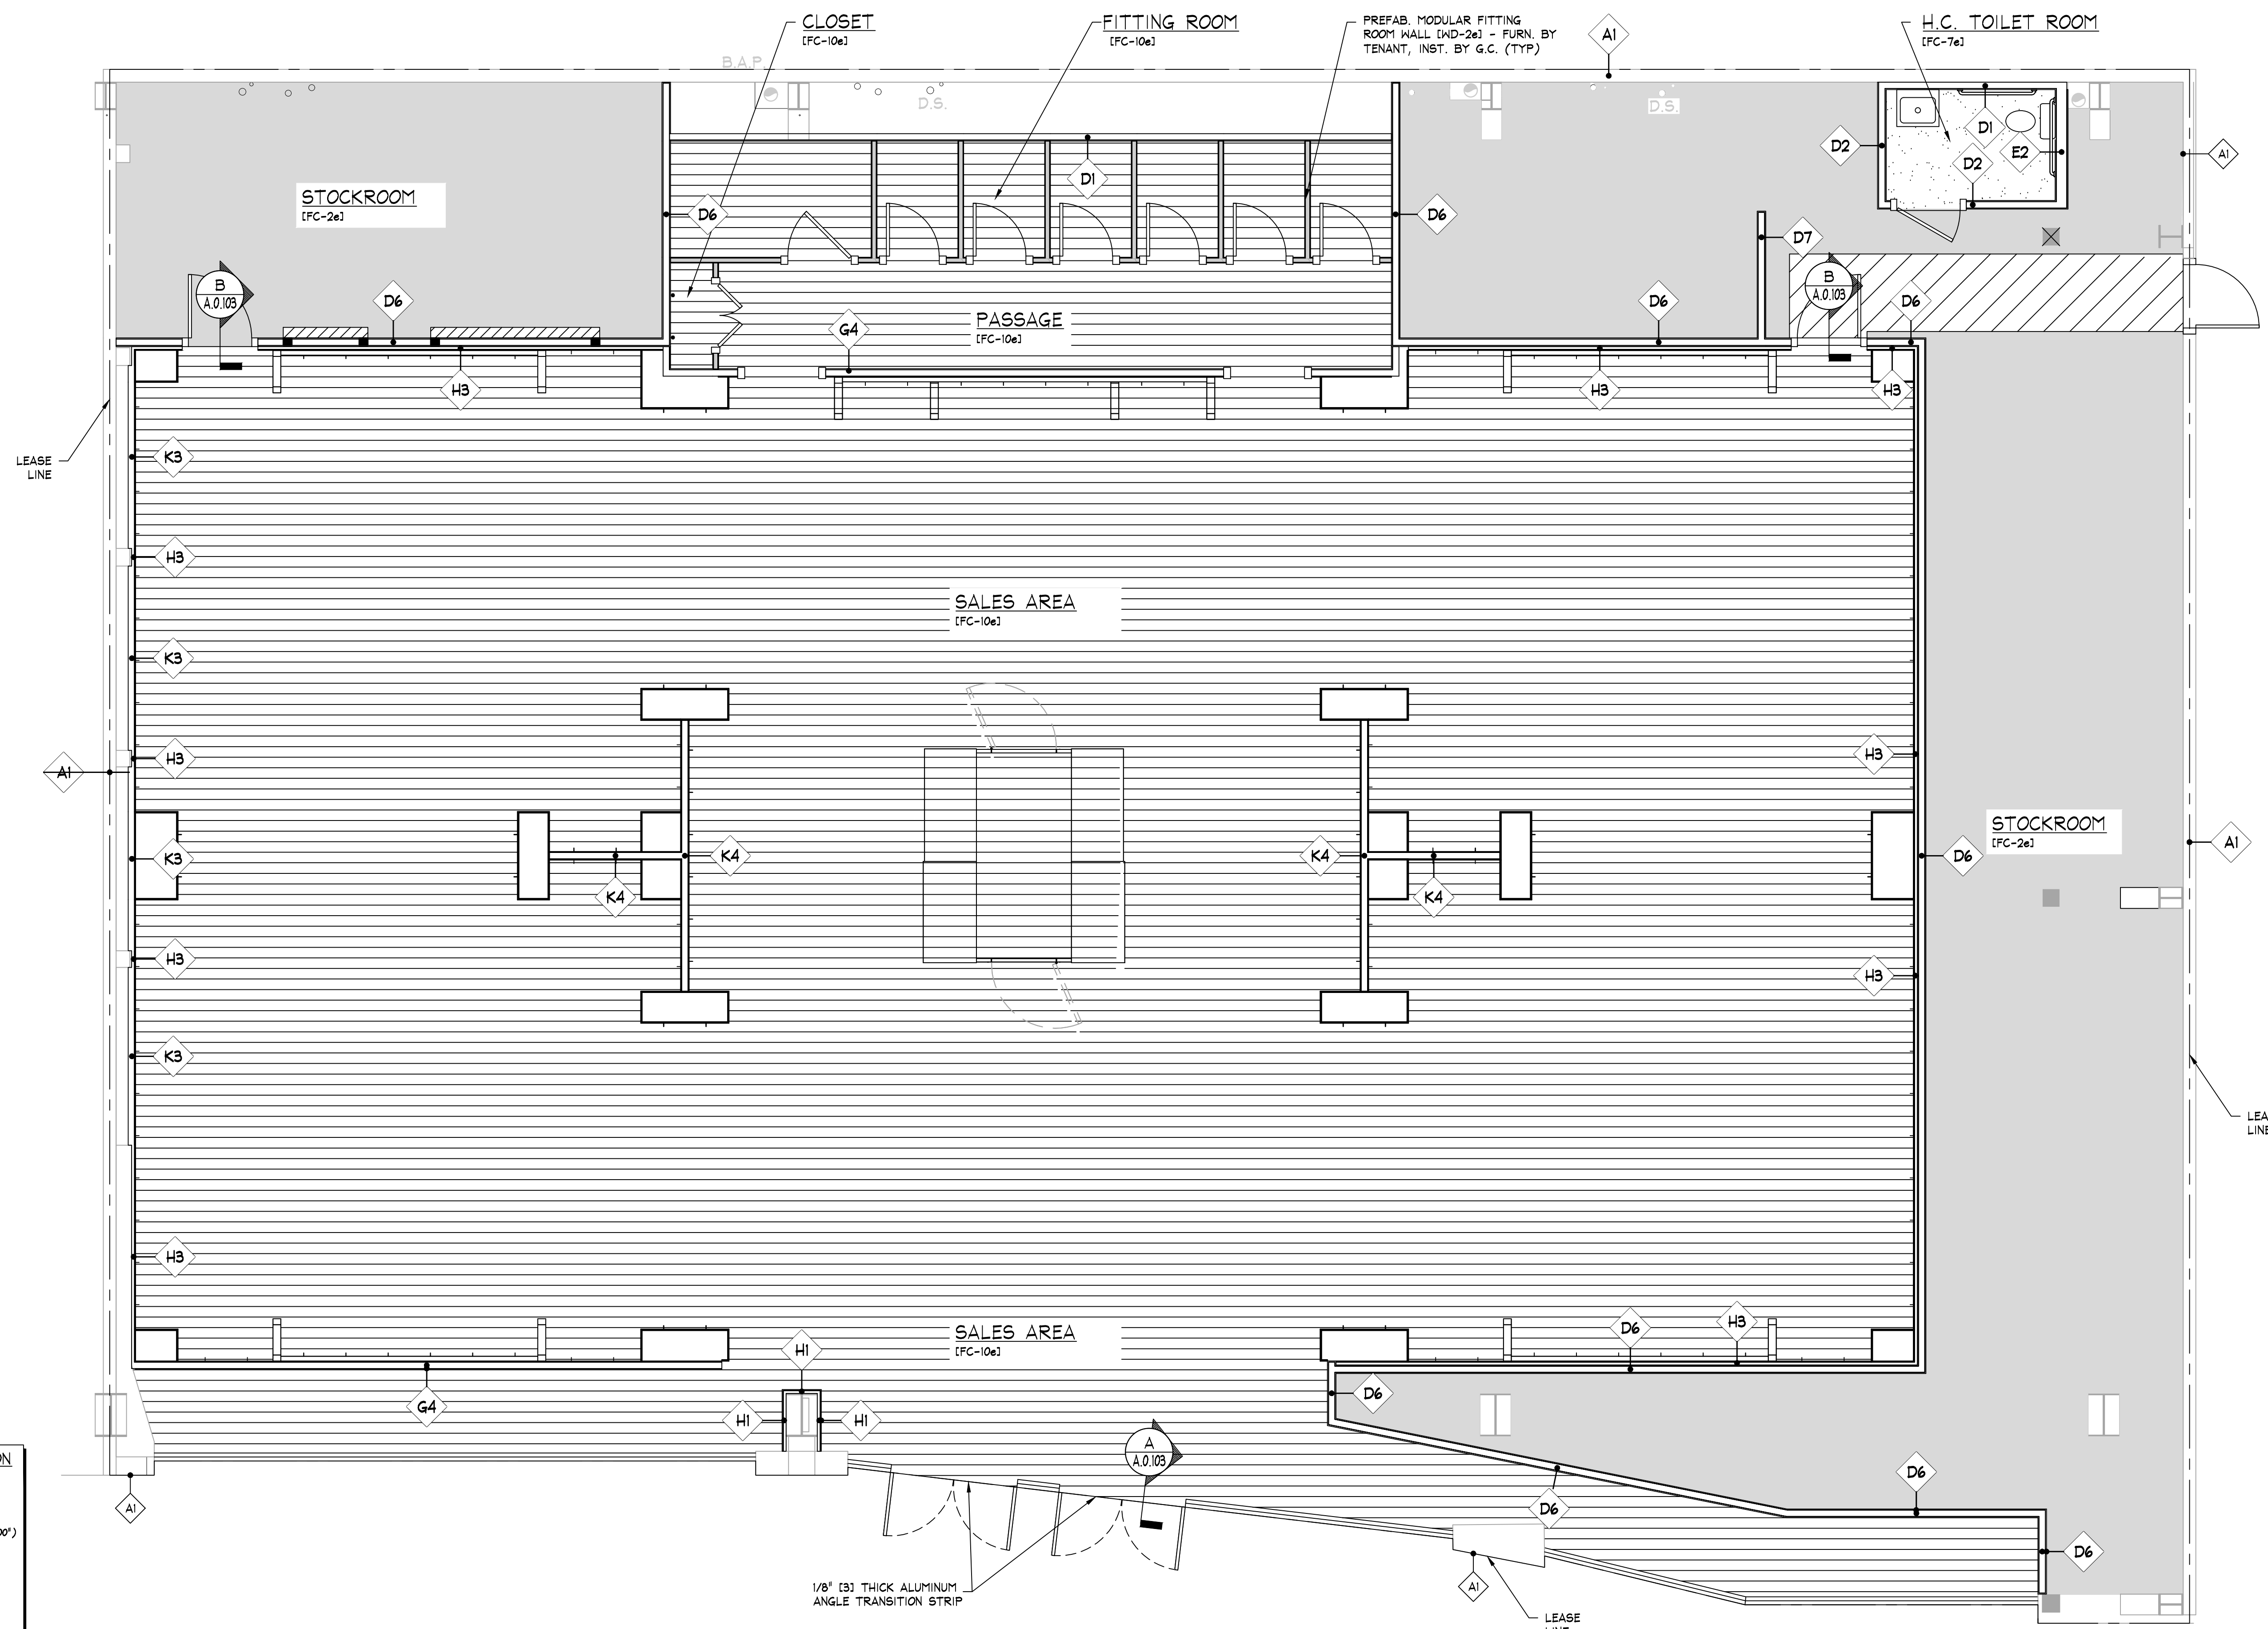

NOTE:
G.C. SHALL PATCH & REPAIR ALL HOLES IN ALL STOCKROOM WALLS. TAPE, SPACKLE, SAND, & PRIME AS REQ'D TO PREPARE FOR STOCKROOM PAINTING. COORD. AS REQ'D WITH TENANT FIELD REP.

NOTE:
G.C. SHALL PAINT ALL STOCKROOM WALLS (P-26) UP TO DECK. IF DECK IS OVER 16'-0\"/>

NOTE:
SEE FINISH & MATERIAL SCHEDULES ON SHEET 'A.0.020'

STEEL STUD PRODUCT IDENTIFICATION PER SSMA STANDARDS

3625/25-30

MATERIAL THICKNESS IN MILS (1/1000")
(EX. 30 = .030")


FLANGE WIDTH (1/100")
(EX. 125 = 1.25" OR 1/8")

STYLE
S = STUD OR JOIST SECTION
T = TRACK SECTION
U = CHANNEL SECTION
F = FURRING CHANNEL SECTION

MEMBER WIDTH (1/100")
(EX. 362 = 3.62" OR 3/8")

REFERENCE GAUGE CHART

MILS	GAUGE NO.
18	25
27	20
30	20 - DRYWALL
33	20 - STRUCTURAL
43	16
54	16
68	14
97	12

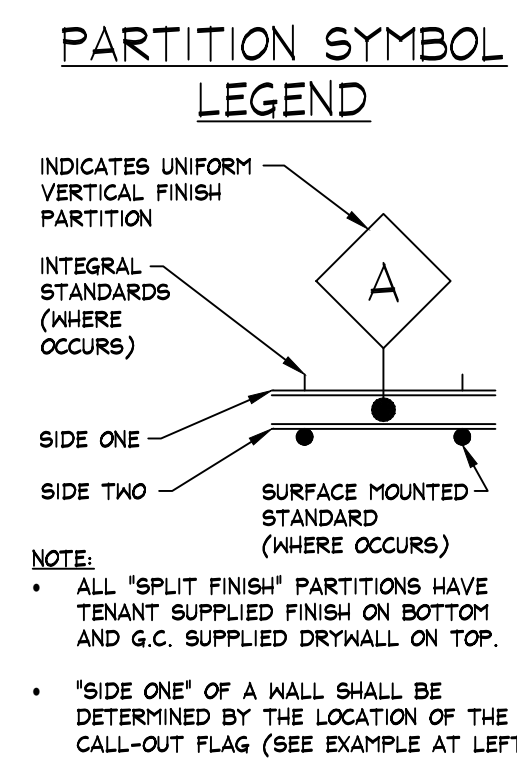

WALL & FLOOR FINISH PLAN


SCALE: 1/4" = 1' - 0"

PARTITION INDEX


TYPE	CORE MATERIAL	FURN. BY	STUD SPACING	STUD HEIGHT	SIDE ONE		FURN. BY	SIDE TWO		FURN. BY
					FINISH	FINISH HEIGHT		FINISH	FINISH HEIGHT	
A1	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING	EXISTING
D1	3625/25-30 METAL STUD	G.C.	24" O.C.	TO CEILING	DRYWALL	TO CEILING	G.C.	NONE	N/A	N/A
D2	3625/25-30 METAL STUD	G.C.	24" O.C.	TO CEILING	DRYWALL	TO CEILING	G.C.	DRYWALL	TO CEILING	G.C.
D5	3625/25-30 METAL STUD	G.C.	24" O.C.	TO CEILING	MDF	TO CEILING	TENANT	DRYWALL	TO CEILING	G.C.
D6	3625/62-30 METAL STUD	G.C.	16" O.C.	TO STRUCTURE	DRYWALL	TO CEILING	G.C.	DRYWALL	TO STRUCTURE	G.C.
D7	3625/25-30 METAL STUD	G.C.	24" O.C.	10'-0"	DRYWALL	10'-0"	G.C.	DRYWALL	10'-0"	G.C.
E2	6005/25-30 METAL STUD	G.C.	24" O.C.	TO CEILING	DRYWALL	TO CEILING	G.C.	DRYWALL	TO CEILING	G.C.
G4	3625/62-30 METAL STUD	G.C.	24" O.C.	TO STRUCTURE	DRYWALL	TO CEILING	G.C.	MDF	11'-0" *	TENANT
H1	1625/25-30 METAL STUD	G.C.	24" O.C.	11'-0"	DRYWALL	11'-0"	G.C.	NONE	N/A	N/A
H3	1625/25-30 METAL STUD	G.C.	24" O.C.	11'-0"	MDF	11'-0"	TENANT	NONE	N/A	N/A
K3	3625/25-30 METAL STUD	G.C.	24" O.C.	11'-0"	MDF	11'-0"	TENANT	NONE	N/A	N/A
K4	3625/25-30 METAL STUD	G.C.	24" O.C.	11'-0"	MDF	11'-0"	TENANT	MDF	11'-0"	TENANT

*** PARTITION GENERAL NOTES:
* SEE PARTITION DETAILS ON SHEET 'A.0.140'.
* IF REQUIRED BY LANDLORD OR BUILDING DEPT., G.C. SHALL EXTEND SALES/STOCK PARTITION DRYWALL TO DECK, BOTH SIDES, AND SEAL (1) HOUR RATED UL DESIGN #465.
* AS REQUIRED, G.C. SHALL SUBSTITUTE 3625/62-30 METAL STUDS AT PLATFORM LOCATIONS ONLY (VERIFY WITH NEW PLANS).
* DRYWALL FINISH MATERIALS SHALL BE FURNISHED BY G.C., MDF FINISH MATERIALS SHALL BE FURNISHED BY TENANT.
* G.C. SHALL TAPE, SPACKLE, SAND AND PRIME DRYWALL (WHERE EXPOSED).
* G.C. SHALL PROVIDE BACK TO BACK METAL STUDS AT SLOTTED STANDARD LOCATIONS.
* G.C. SHALL USE WATER RESISTANT GNB AT MET LOCATIONS.
* G.C. SHALL PROVIDE 3/2" THICK BATT INSULATION FOR SOUND ATTENUATION IN TOILET ROOM WALLS, STC OF 42 OR BETTER.
* G.C. SHALL BRACE FURRING PARTITIONS ONLY TO DEBISING WALL @ 5'-0" A.F.F. (4'-0" O.C. MIN.).

** FOR NEW DEBISING WALLS, G.C. SHALL CONFIRM WITH AEO PROJECT MANAGER PRIOR TO BID

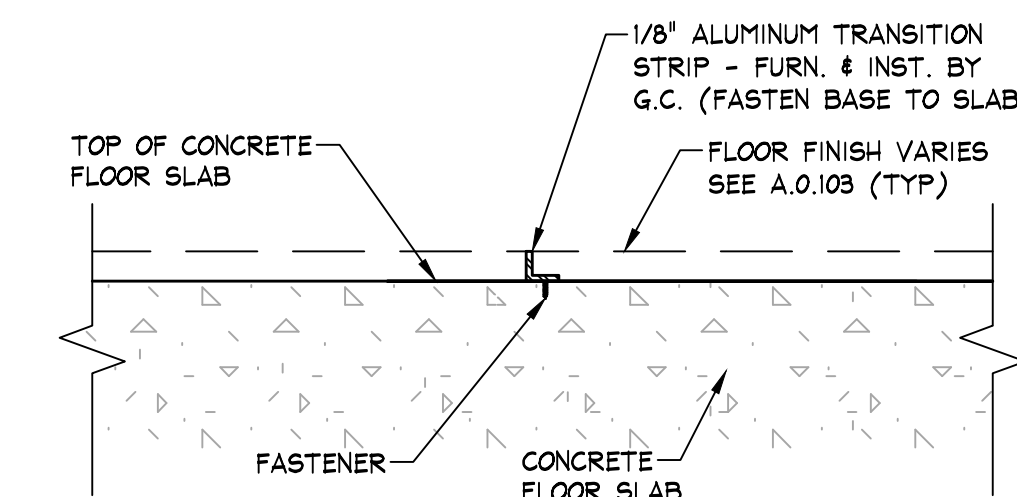

A FLOOR TRANSITION
SCALE: 3" = 1'-0" (1:4)

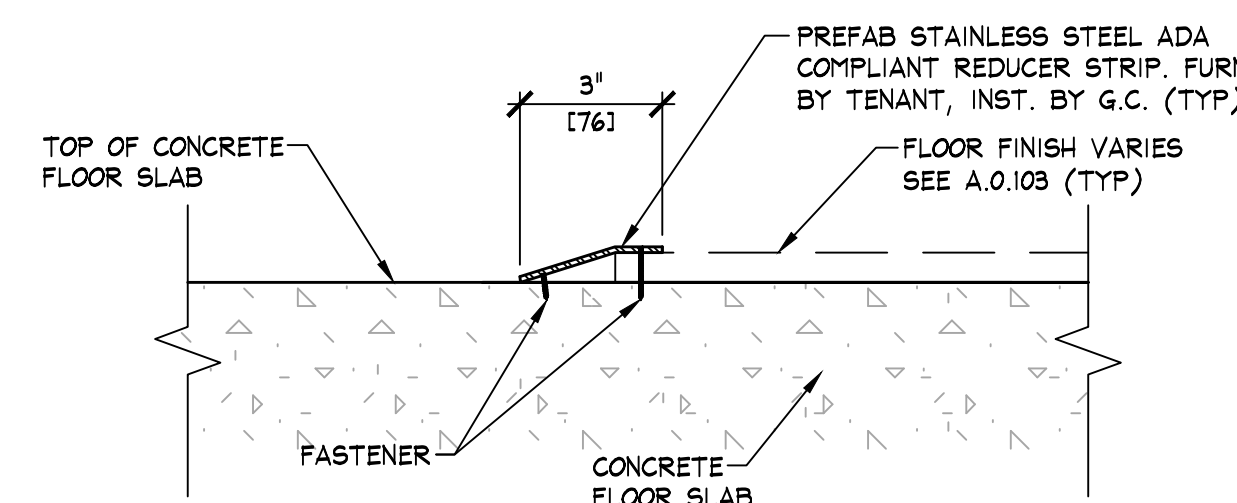

B FLOOR TRANSITION
SCALE: 3" = 1'-0" (1:4)